


Setup MinIO as AWS S3 alternative in development with docker

Installation

1. Make sure your local machine already have Docker installed.
2. Run MinIO:

```
docker run \
  -p 9000:9000 \
  -p 9001:9001 \
  --name minio-local \
  -v ${HOME}/projects/minio:/data1 \
  -e "MINIO_ROOT_USER=miniouser" \
  -e "MINIO_ROOT_PASSWORD=miniopass" \
  quay.io/minio/minio server /data1 --console-address ":9001"
```

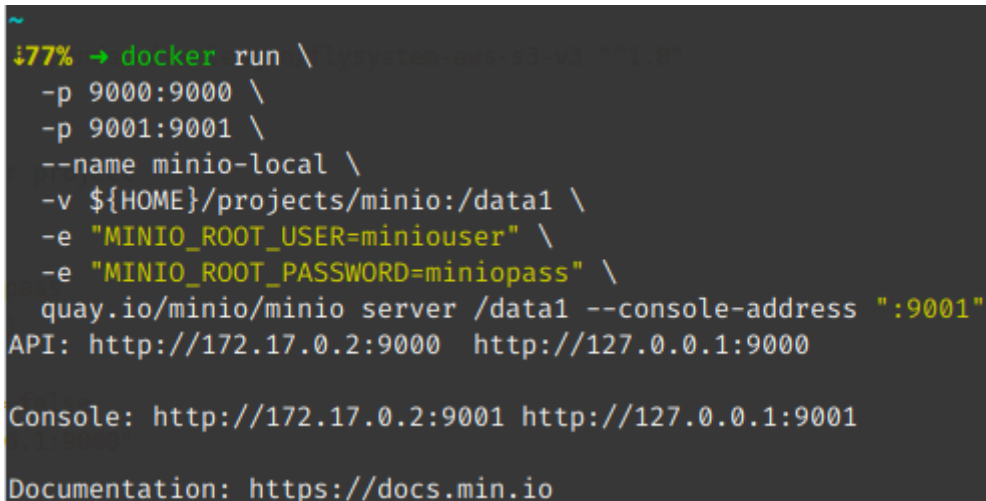

```
~
❯ docker run \
  -p 9000:9000 \
  -p 9001:9001 \
  --name minio-local \
  -v ${HOME}/projects/minio:/data1 \
  -e "MINIO_ROOT_USER=miniouser" \
  -e "MINIO_ROOT_PASSWORD=miniopass" \
  quay.io/minio/minio server /data1 --console-address ":9001"
API: http://172.17.0.2:9000 http://127.0.0.1:9000
Console: http://172.17.0.2:9001 http://127.0.0.1:9001
Documentation: https://docs.min.io
```

3. On your Laravel project, install the dependency

```
composer require --with-all-dependencies league/flysystem-aws-s3-v3 "^1.0"
```

4. Change the `.env` on your project


```
AWS_ACCESS_KEY_ID=miniouser
AWS_SECRET_ACCESS_KEY=miniopass
AWS_DEFAULT_REGION=us-east-1
AWS_BUCKET=testing-saint
AWS_USE_PATH_STYLE_ENDPOINT=false
AWS_ENDPOINT="http://127.0.0.1:9000"
```

5. Running after rebooting your PC / Laptop / Mac (shall I mention rpi too?)

```
docker start minio-local
```

6. Accessing the web interface Open your web browser, access <http://localhost:9001>


7. Creating bucket

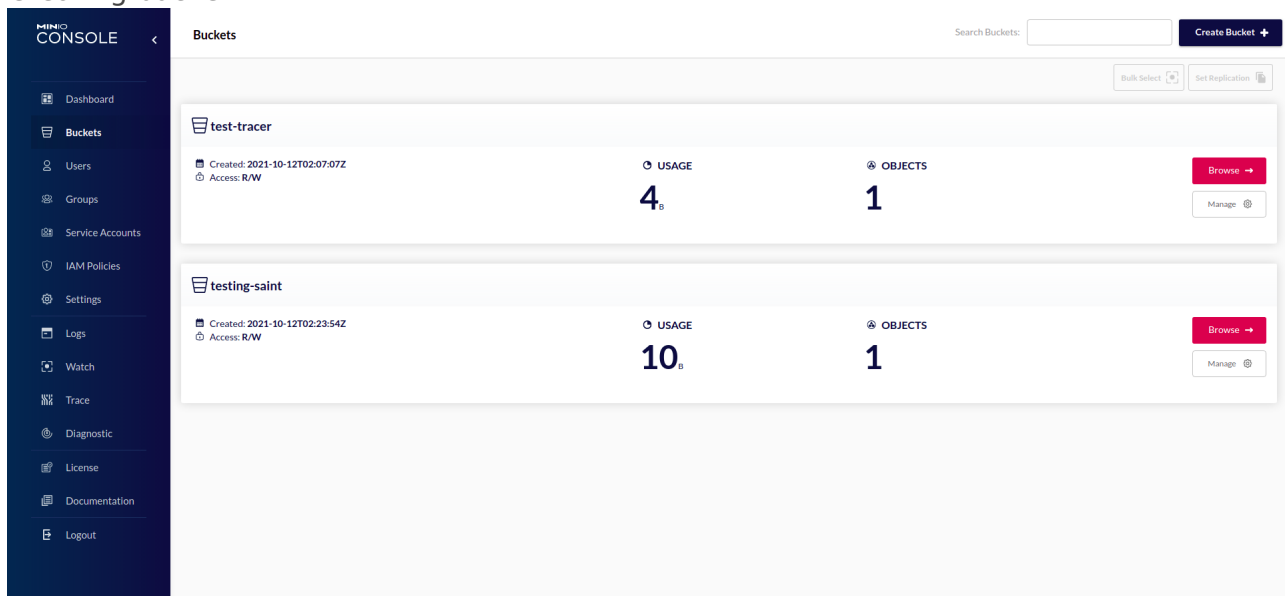

The screenshot displays the Minio Console interface, specifically the 'Buckets' section. On the left is a dark sidebar with navigation links: Dashboard, Buckets, Users, Groups, Service Accounts, IAM Policies, Settings, Logs, Watch, Trace, Diagnostic, License, Documentation, and Logout. The main content area shows a list of buckets. At the top right of the main area, there is a 'Search Buckets:' input field and a 'Create Bucket +' button. Below this, there are two bucket entries:

Bucket Name	Created	Access	USAGE	OBJECTS	Actions
test-tracer	2021-10-12T02:07:07Z	R/W	4 _B	1	Browse →, Manage ⚙
testing-saint	2021-10-12T02:23:54Z	R/W	10 _B	1	Browse →, Manage ⚙

Click 'Create Bucket', and a modal window will be shown like this:

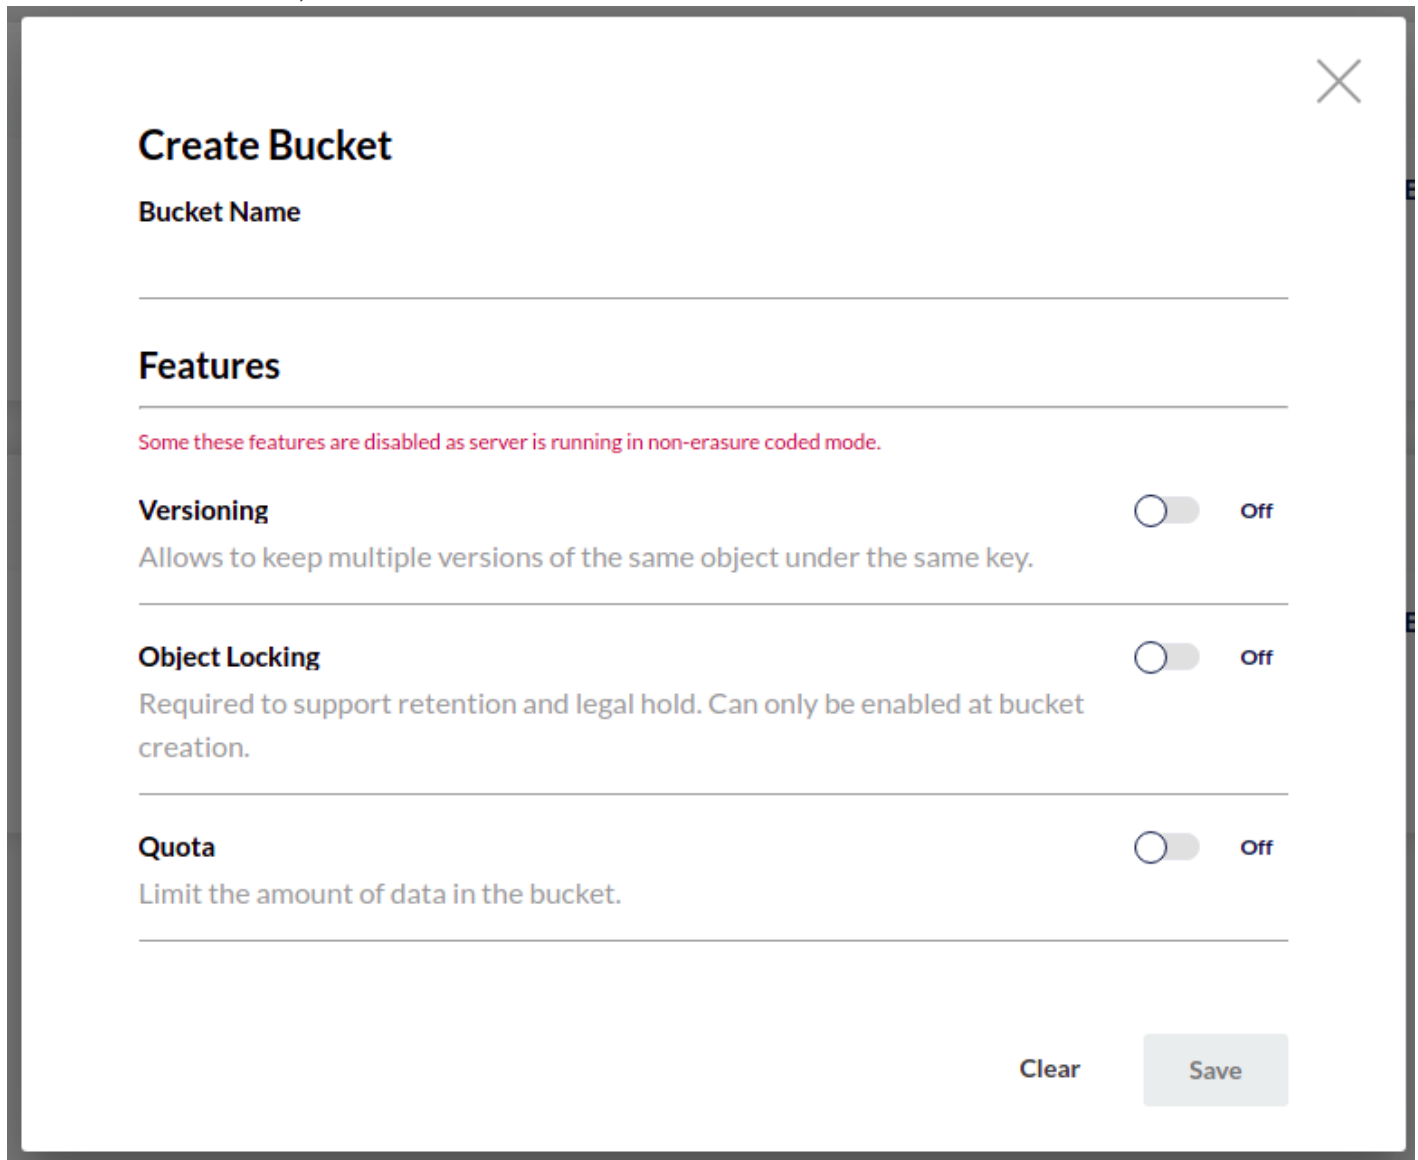

Create Bucket

Bucket Name

Features

Some these features are disabled as server is running in non-erasure coded mode.

Versioning ☐ Off
Allows to keep multiple versions of the same object under the same key.

Object Locking ☐ Off
Required to support retention and legal hold. Can only be enabled at bucket creation.

Quota ☐ Off
Limit the amount of data in the bucket.

Clear Save

Set the bucket name. The bucket name will be used as `AWS_BUCKET` in your app.

Further Reading

[MinIO Documentation](#)

Revision #2

Created 12 October 2021 02:33:22 by Adli Ikhwanur Ifkar

Updated 12 October 2021 02:45:04 by Adli Ikhwanur Ifkar